



HORIZONTAL FIXING KIT
INSTRUCTION MANUAL

The Sail Loft, Unit 16, Sandford Lane Industrial Estate, Wareham, Dorset BH20 4DY

Phone: +44 (0)1929 554308
www.shade-solutions.com



Email: info@kempsails.com
www.kempsails.com



HOW TO FIT

To assemble your fixing kit you may need some basic hand tools

CORDLESS DRILL



HANDHELD PLIERS




SCREW DRIVER




- STEP 1 -

Fasten chosen anchorage fixing into position.

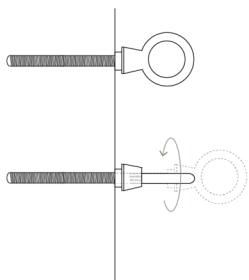


- STEP 2 -

Attach 1 x Carbine Hook and 1 x Pulley Block 1.

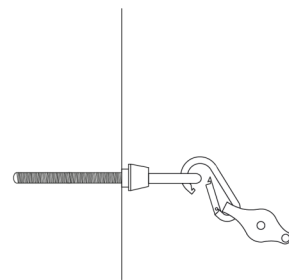

- STEP 3 -

Tie rope onto the becket of Pulley Block 1 (IDEALLY BOWLINE) and thread through Pulley Block 2.

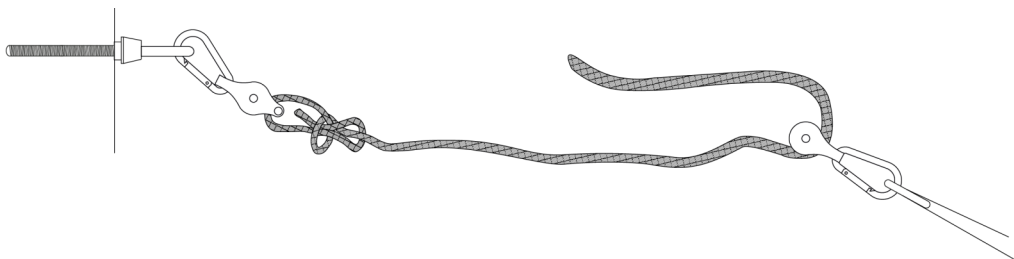

- STEP 4 -

Thread remain rope back through Pulley Block 1 and instal 1 x Cross end Cleat to desired position. Tension Shade Sail

